

JIS flange (VF/VG)

Features


O-ring sealing

There are VG type and VF type flanges.

VG has gasket groove. VF has no gasket groove.


Used from low vacuum to high vacuum.

They are called VF70, VG200, etc.

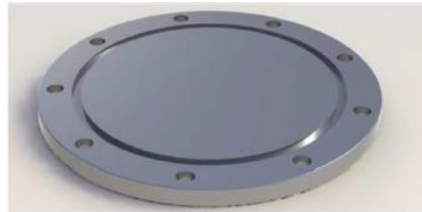

31

Standard of JIS flange

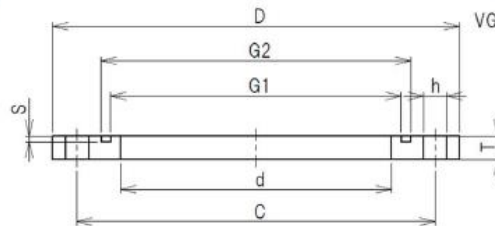

Name	Diameter D	Thickness T		Quantity	Bolt holes		Groove			Pipe O.D. d
		Casting	Other		Diameter h	P.C.D. C	I.D. G1	O.D. G2	Depth S	
10	70	10	8	4	10	50	24	34	3	17.3
20	80	10	8	4	10	60	34	44	3	27.2
25	90	10	8	4	10	70	40	50	3	34.0
40	105	12	10	4	10	85	55	65	3	48.6
50	120	12	10	4	10	100	73	80	3	60.5
65	145	12	10	4	12	120	85	95	3	76.3
80	160	14	12	4	12	135	100	110	3	89.1
100	185	14	12	8	12	160	120	130	3	114.3
125	210	14	12	8	12	185	150	160	3	139.8
150	235	14	12	8	12	210	175	185	3	165.2
200	300	18	16	8	15	270	225	241	4.5	216.3
250	350	18	16	12	15	320	275	291	4.5	267.4
300	400	18	16	12	15	370	325	341	4.5	318.5
350	450	-	20	12	15	420	380	396	4.5	355.6
400	520	-	20	12	19	480	430	446	4.5	406.4

32